

**NIHVA**

---

# Telescopic Conveyor



**We Make Possible**

[www.nihva.com](http://www.nihva.com)

**NIHVA Telescopic Conveyor** – NIHVA designed the Customized Telescopic conveyor according to your required weight and speed to improve both productivity and the work environment NIHVA telescopic belt conveyor is an effective and ergonomic alternative to labor-intensive routines. NIHVA telescopic belt conveyors can be used to load/unload any type of loose-loaded cargo - typically parcels boxes, bags, loose items, sacks, tires and so many variety of material.



### Features

- Can be customized as per application
- Considered Maximum safety
- Side panel, Boom support,
- Belt speed 30m per minute
- Extends up to 15m
- Push button controls
- Ideal for boxes, bags, totes and loose items
- Reversible belt direction
- Front LED lighting as standard
- Emergency stops in three positions
- Soft start motor and belt
- Variety of models and options available NIHVA Telescopic Conveyor Benefits:
- Save Human efforts by minimizing manual handling
- Save time
- Low energy cost
- Design based on safety and easy operate




# Technical Specification - Telescopic Belt Conveyor (Made in India)

Sr. No.	Particular	Specification
1	Material To Be Handle	Boxes
2	Weight Of The Box/Bags	40 Kg. maximum
3	Size of Box/Bags	600 (L) x 300 (W) x 400 (H) (OVERALL)
4	Temperature	Ambient
5	Capacity	550 Boxes per hour
6	Type	Collapsible Boom type hinged Telescopic Belt Conveyor
7	Design Capacity	600 per hour
8	Size Of Belt	600 MM Width
9	Type Of Belt	Smooth Top 2 Ply, PVC Coated Endless type,
10	Length of conveyor	Fixed length : 4800 mm Telescopic ( expanded) : 6000 mm Total : 10800 mm
11	Main Body Of Conveyor	Manufacturing from 6 MM Thick. IS 226 Plate Material
12	Snub Pulley For Conveyor	Precision Machine from 3 Inch OD Schedule 40 Pipe With Inverted Bearing Fitted
13	Drive Pulley	Manufacture from 8 Inch ID Schedule 40 Pipe With Rubber Legging & hearing bone surface
14	Telescopic Movement	Mechanical arrangement ("Diamond" make chain)
15	Mounting	On Fixed MS Chassis Mounted On fabricated frame with FIX and CASTOR wheel with manual toeing bar
16	Height Adjustment	With 2 HP power pack & cylinder for height adjustment ( "Rexroth" parts ),(IBB motor)
17	Panel	The conveyor comes with a fixed main panel on rear side and front side only operating panel with emergency stopper sensor bar , LED lighting , totally consoled wiring.
18	Painting	INTERNAL: Two coat of Epoxy red oxide and white paint. EXTERNAL: Two coat of primary & Two coat of high gloss Duco paints.

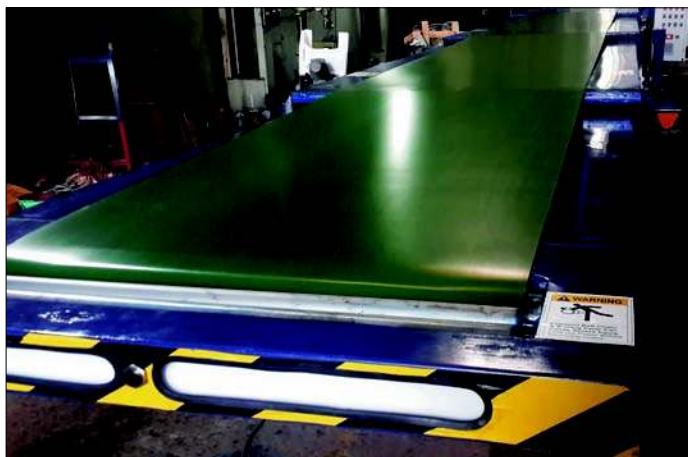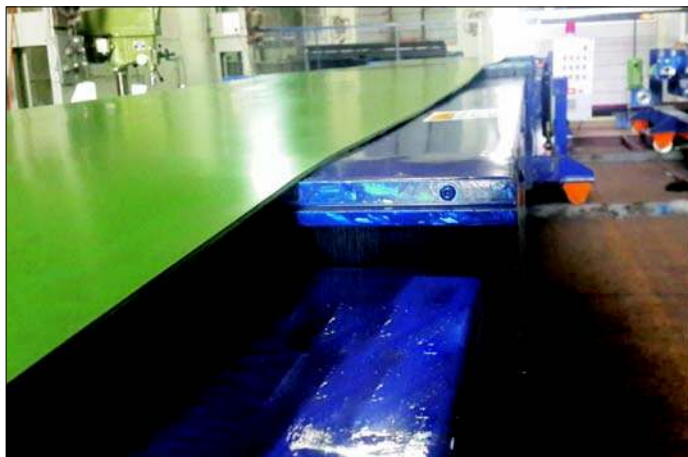



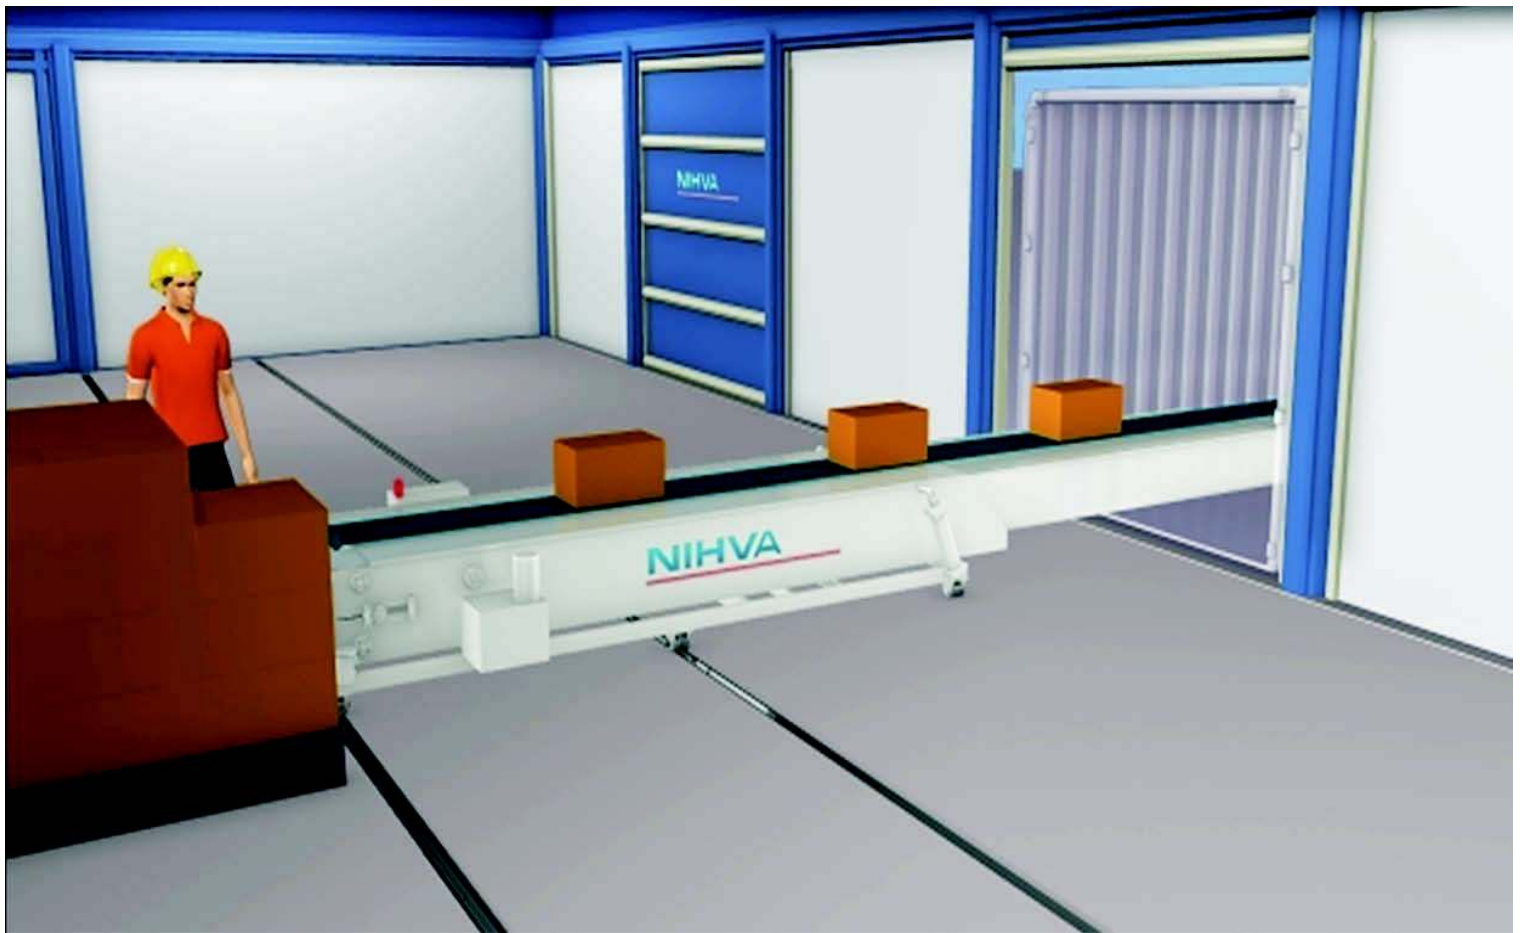

## NIHVA

### Automation Solutions

Automation Solutions

Pick & Place Machines

SPM

Wireless Automation (M2M)

Automation Softwares

Grease / Oil Separator

### Material Handling Equipments

Dock Levellers

Scissor lifts / Mobile ramp

Dock Shelters / Dock Seals / Dock House

Goods Lift

Spiral Conveyors / Belt Conveyors

Telescopic Conveyors

### Door Automation

High speed doors / Sectional doors

Sliding doors / Folding Doors

Fire rated - Mot. Rolling shutters / Sliding doors

Hanger Doors / Extra large opening doors

Boom barriers / Turnstiles / Bollards

Sliding / Cantilever Gates

### International Business Partners



Head Office: G-Block, 1st Floor, Thermax Chowk,  
MIDC, Above Renault Showroom,  
Chinchwad, Pune - 411019

# NIHVA

**NIHVA Technologies Pvt. Ltd.**

+91 2066 3040 33 +91 85 51091 333 sales@nihva.com www.nihva.com

## NETWORKS

### WEST

Pune | Mumbai | Nashik | Nagpur  
Indore | Ahmedabad | Surat | Vadodara

### NORTH

Delhi | Chandigarh

### SOUTH

Chennai | Hyderabad | Bengaluru

### EAST

Kolkata | Bhubaneswar